

特徴

シングルインライン形状でスペースファクタの改善



動作温度範囲

0°C ~ +70°C


保存温度範囲

-20°C ~ +85°C

電気的特性 ELECTRICAL SPECIFICATION Ta = 25°C

Part Name	Impedance [Ω] ±10%	Total TD Td[ns]	Tap to Tap Td[ns]	Rise Time [ns] Max.	Distortion [%] Max.	Attenuation [%] Max.
SIL5N101	100	5	1 ± 0.5	2	15	10
SIL10N101		10	2 ± 0.5	3.5	15	10
SIL20N101		20	4 ± 1.0	6	15	10
SIL40N101		40	8 ± 1.5	12	15	10
SIL50N101		50	10 ± 2.0	15	15	10
SIL80N101		80	16 ± 2.0	25	15	10
SIL100N101		100	20 ± 2.0	30	15	10
SIL5N201	200	5	1 ± 0.5	2	15	10
SIL10N201		10	2 ± 0.5	3.5	15	10
SIL20N201		20	4 ± 1.0	6	15	10
SIL40N201		40	8 ± 1.5	12	15	10
SIL50N201		50	10 ± 2.0	15	15	10
SIL80N201		80	16 ± 2.0	25	15	10
SIL100N201		100	20 ± 2.0	30	15	10
SIL5N301	300	5	1 ± 0.5	2	15	10
SIL10N301		10	2 ± 0.5	3.5	15	10
SIL20N301		20	4 ± 1.0	6	15	10
SIL40N301		40	8 ± 1.5	12	15	10
SIL50N301		50	10 ± 2.0	15	15	10
SIL80N301		80	16 ± 2.0	25	15	10
SIL100N301		100	20 ± 2.0	30	15	10

外形図 Dimensions [mm] typ.

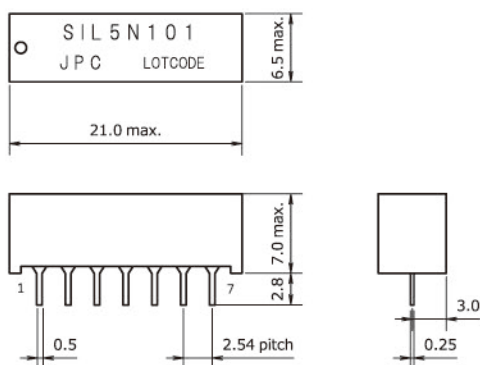

結線図 Connecting diagram

