



特徴 バッファゲートを組み込んだ5TAPスタンダードタイプ



仕様

組込ロジック

TTL 74S04 相当

電源電圧

DC 5.0V ± 0.25V

消費電流

50mA typ. (Vcc = 5.0V)

最大電源電圧

DC 7.0V

環境条件

動作温度範囲

0°C ~ +70°C

保存温度範囲


-20°C ~ +85°C

電気的特性 ELECTRICAL SPECIFICATION Ta = 25°C

Part Name	Total Td [ns]	Tap to Tap Td[ns]	Rise Time [ns] Max.	MIN. Pulse Width [ns]
ADM25NJ	25 ± 2	5 ± 2	3	15
ADM50NJ	50 ± 3	10 ± 3	3	20
ADM75NJ	75 ± 3	15 ± 3	3	30
ADM100NJ	100 ± 5	20 ± 3	3	40
ADM150NJ	150 ± 7.5	30 ± 3	4	60
ADM200NJ	200 ± 10	40 ± 4	4	80
ADM250NJ	250 ± 12.5	50 ± 5	4	100
ADM300NJ	300 ± 15	60 ± 5	4	120
ADM500NJ	500 ± 25	100 ± 7	4	200

Rise Time 0.75V to 2.4V at no Loads

外形図 Dimensions [mm] typ.

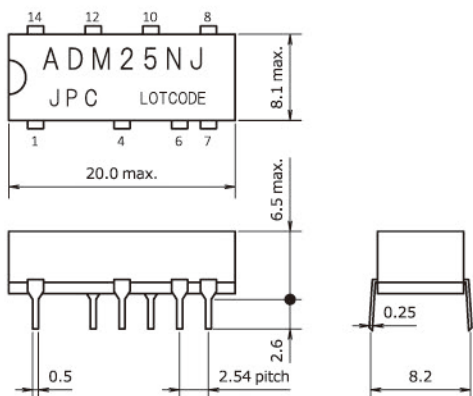

結線図 Connecting diagram

