



特徴 バッファゲートを組み込んだ10TAPスタンダードタイプ



仕様

■ **組込ロジック**
TTL 74S04

■ **電源電圧**
DC 5.0V

■ **消費電流**
90mA typ.

■ **ドライブ能力**
20 TTL/UNIT

環境条件


■ **動作温度範囲**
0°C ~ +70°C

■ **保存温度範囲**
-20°C ~ +85°C

電気的特性 ELECTRICAL SPECIFICATION Ta = 25°C

Part Name	Total Td [ns]	Tap to Tap Td[ns]	Rise Time [ns] Max.	MIN. Pulse Width [ns]
ADM50NT	50 ± 3	5 ± 1	5	10
ADM75NT	75 ± 4	7.5 ± 1.5	5	15
ADM100NT	100 ± 5	10 ± 2	5	20
ADM150NT	150 ± 7.5	15 ± 3	5	30
ADM200NT	200 ± 10	20 ± 3	5	40
ADM250NT	250 ± 12.5	25 ± 3	5	50
ADM300NT	300 ± 15	30 ± 4	5	60
ADM500NT	500 ± 25	50 ± 5	5	100

外形図 Dimensions [mm] typ.

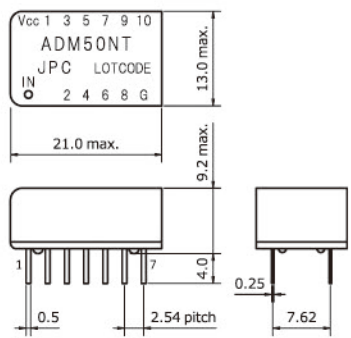

結線図 Connecting diagram

